
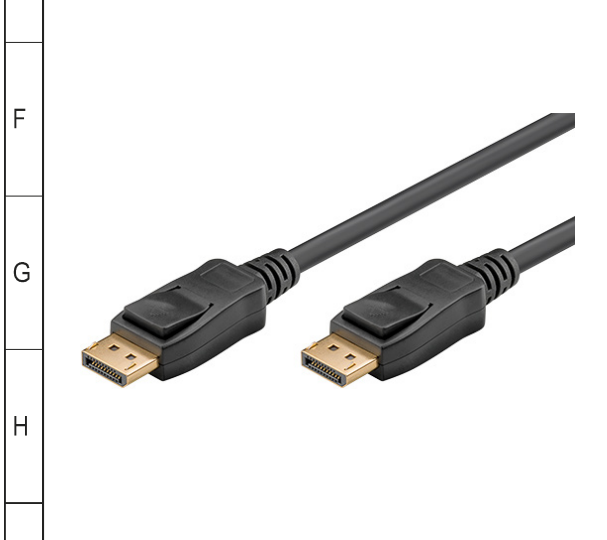
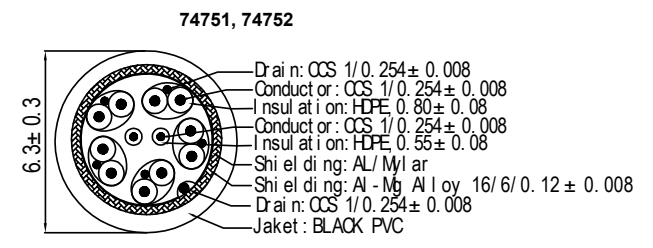


Pin-Belegung / Pin Assignment

P1	P2	10	3
1	12	12	1
3	10	11	2
2	11	15	15
4	9	17	17
6	7	16	16
5	8	18	18
7	6	19	19
9	4	13	13
8	5	14	14

SHELL — BRAID — SHELL
 — PAIR
 — DRAIN WIRE OF PAIR

Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)
74751	DP 2.1 Kabel LC 0100 1,0m sw 54GB	1000 ± 30 mm
74752	DP 2.1 Kabel LC 0200 2,0m sw 54GB	2000 ± 30 mm
74753	DP 2.1 Kabel LC 0300 3,0m sw 54GB	3000 ± 50 mm
74754	DP 2.1 Kabel LC 0500 5,0m sw 54GB	5000 ± 70 mm

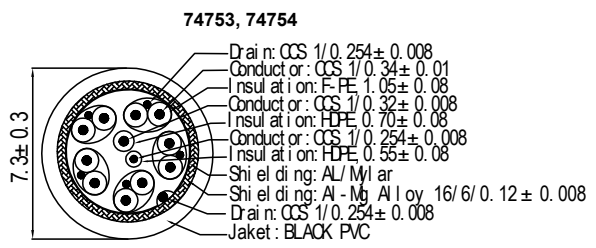

DisplayPort™ Verbindungskabel 2.1

- max. Übertragungsrate von bis zu 54 Gbit/s
- mit Staubschutzkappe

Anschlüsse: 2x DisplayPort™-Stecker
Kontakte: vergoldet
Kabeltyp: Rundkabel
Material Kabelmantel: PVC, schwarz
Außendurchmesser Kabel: 6,3 ± 0,3 mm (74751, 74752)
 7,3 ± 0,3 mm (74753, 74754)
Max. Datenübertragungsrate: 54 Gbit/s
Unterstützte Videostandards: 10K @ 60 Hz (10240 x 4320)
 8K @ 120 Hz (7680 x 4320)
 4K @ 144 Hz (3840 x 2160)
 Full HD @240 Hz (1920 x 1080)
Isolationswiderstand: 300 V ===, 10 MΩ min.

DisplayPort™ Connector Cable 2.1

- max. transmission rate of up to 54 Gbit/s
- with protective dust cap

Connections: 2x DisplayPort™ plug
Contacts: gold-plated
Cable type: round cable
Material Cable Jacket: PVC, black
Outer diameter cable jacket: 6.3 ± 0.3 mm (74751, 74752)
 7.3 ± 0.3 mm (74753, 74754)
Max. data transmission rate: 54 Gbit/s
Supported video standards: 10K @ 60 Hz (10240 x 4320)
 8K @ 120 Hz (7680 x 4320)
 4K @ 144 Hz (3840 x 2160)
 Full HD @240 Hz (1920 x 1080)
Insulation resistance: 300 V ===, 10 MΩ min.

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	23.09.2024	DP 2.1 Kabel LC XXXX X,Xm sw 54GB	1/1
		gepr.:	23.09.2024		
		Norm:		Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change				74751ff	

