

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

B

C

D

E

F

G

H

I

J

A

B

C

D

E




F

G

H


I

J

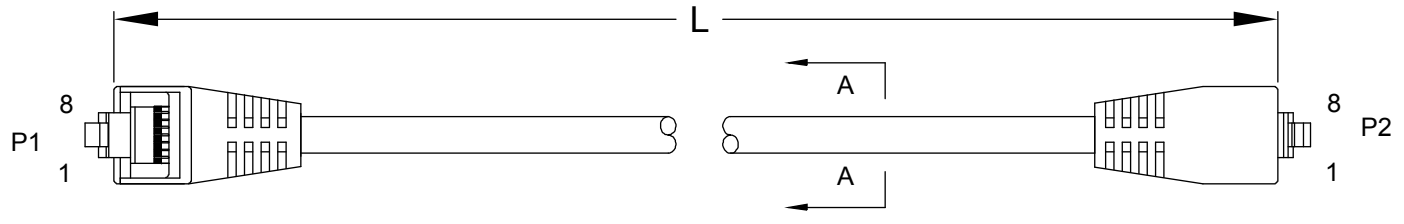


Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)	Farbe / color
96076	CAT 5-0025 F/UTP (2x90°) SCHWARZ 0.25m	250 ± 20 mm	schwarz / black
96077	CAT 5-0050 F/UTP (2x90°) SCHWARZ 0.50m	500 ± 20 mm	
96078	CAT 5-0100 F/UTP (2x90°) SCHWARZ 1m	1000 ± 20 mm	
96079	CAT 5-0200 F/UTP (2x90°) SCHWARZ 2m	2000 ± 40 mm	
96080	CAT 5-0300 F/UTP (2x90°) SCHWARZ 3m	3000 ± 50 mm	
96081	CAT 5-0500 F/UTP (2x90°) SCHWARZ 5m	5000 ± 70 mm	weiß / white
96060	CAT 5-0025 F/UTP (2x90°) WEISS 0.25m	250 ± 20 mm	
96061	CAT 5-0050 F/UTP (2x90°) WEISS 0.50m	500 ± 20 mm	
96062	CAT 5-0100 F/UTP (2x90°) WEISS 1m	1000 ± 20 mm	
96063	CAT 5-0200 F/UTP (2x90°) WEISS 2m	2000 ± 40 mm	
96064	CAT 5-0300 F/UTP (2x90°) WEISS 3m	3000 ± 50 mm	
96065	CAT 5-0500 F/UTP (2x90°) WEISS 5m	5000 ± 70 mm	

Anschlussdiagramm / Wiring diagram

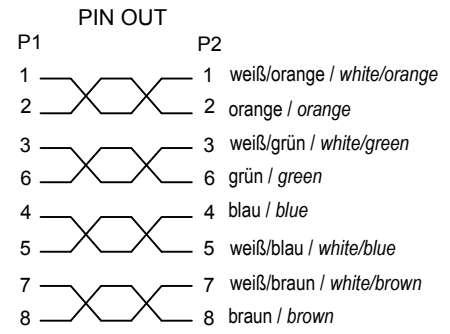

Aderquerschnitt / Wire cross section

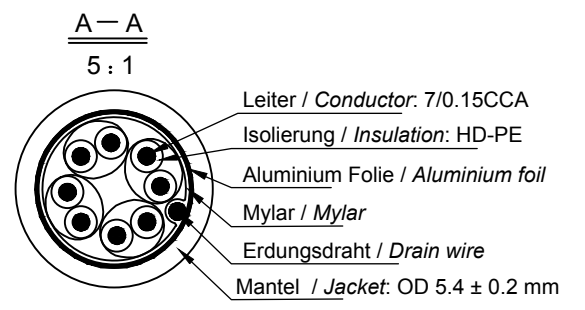

CAT 5e Patchkabel 2x 90° gewinkelt, F/UTP

- angespitzte Slimline-Knickschutzülle
- ohne Rastnasenschutz
- Paarfolge nach EIA/TIA 568B
- Anschlüsse: 2x RJ45-Stecker 90° (8P8C)
- Kontakte: vergoldet
- Material Kabelmantel: PVC
- Schirmungsklasse: F/UTP, folien-gesamtgeschirmt
- Innenleiter: AWG 26/7 (stranded), 4 x 2 x 7/0.15 ± 0.005 CCA
- Spannungsfestigkeit: 300 V ===
- Kontaktwiderstand: max. 3 Ω
- Isolationswiderstand: 10 MΩ @ 10 ms
- Impedanz: 100 Ω
- Konformität: REACH, RoHS

CAT 5e patchcable 2x 90° angled, F/UTP

- pointed slimline strain relief
- without latch protection
- pair-sequence acc. to EIA/TIA 568B
- Connectors: 2x RJ45 plug 90° (8P8C)
- Contacts: gold-plated
- Material cable jacket: PVC
- Shielding: F/UTP, total foil-shielded
- Inner conductor: AWG 26/7 (stranded), 4 x 2 x 7/0.15 ± 0.005 CCA
- Withstanding voltage: 300 V ===
- Contact resistance: max. 3 Ω
- Insulation resistance: 10 MΩ @ 10 ms
- Impedance: 100 Ω
- Conformity: REACH, RoHS

Änderungen		Datum	Name
Datum	Name	gez.: 10.02.2021	aw
		gepr.: 10.02.2021	aw
		Norm:	
Änderungen vorbehalten / Subject to change			

Bezeichnung
CAT 5-XXXX F/UTP (2x90°)
XXXX Xm

Zeichnungs-Nr.:

Blatt
1/1
von

1 2 3 4 5 6 7 8 9 10 11 12 13 14